

Panasonic

ideas for life

PT-LB10NTE

Micro Portable Wireless XGA LCD Projector

PT-LB10E

Micro Portable XGA LCD Projector

PT-LB10VE

Micro Portable XGA LCD Projector

PT-LB10SE

Micro Portable SVGA LCD Projector

The Notebook-Size Wireless



■ High performance, compact body

- 2000/1600 lumens bright*¹
- Notebook-size compact body
- Ultra-lightweight: 2.1 kg*²
- Short-throw zoom lens

■ Quick operation

- 5-second speed start
- One-touch auto setup with digital keystone correction
- Direct power off

■ Sophisticated functions

- Projector AI
- Index window
- Secure, anti-theft features
- Auto power off

■ Easy wireless projection (PT-LB10NTE)

- Simple settings
- User-friendly interface
- Handy "Live" mode
- "Multi Live" mode

*¹ PT-LB10NTE/LB10E/LB10SE: 2000 lumens
PT-LB10VE: 1600 lumens

*² PT-LB10NTE: 2.2 kg (4.9 lbs)
PT-LB10E/LB10VE/LB10SE: 2.1 kg (4.7 lbs)

Set Yourself Free

PT-LB10NTE 2000 lm

WIRELESS XGA Projector



High Performance, Compact Body

2000/1600 Lumens Bright

A high-performance optical system combines with a high-efficiency 155-W UHM™ lamp to deliver a super-bright 2000 lumens (PT-LB10NTE, PT-LB10E, PT-LB10SE) or 1600 lumens (PT-LB10VE). All models deliver crisp, bright images that are easy for the audience to see.

Notebook-Size Compact Body

PT-LB10 models are 297 mm wide by 210 mm deep—the same size as an A4 paper—and only 65 mm high. Each slips easily into a bag or briefcase. The compact size makes these models highly mobile and minimises the space required for presentations or storage.



Unplug and Go

PT-LB10E 2000 lm

MOBILE XGA Projector

PT-LB10SE 2000 lm

MOBILE SVGA Projector



Ultra-Lightweight: 2.1 kg

At only 2.1 kg*, PT-LB10 models won't weigh you down—even when you're toting along a notebook PC as well. Convenient size and weight are just two reasons why the PT-LB10 series is the logical choice for mobile presentations.

* PT-LB10NTE: 2.2 kg

Short-Throw Zoom Lens

This saves space by shortening the distance needed between screen and projector. You can project a 100" image from just three metres away, which lets you place the projector at the front of the table.

PT-LB10VE 1600 lm

MOBILE XGA Projector



Quick Operation



Ready
5-Sec Speed Start
Switch the power on and the projector is ready in just five seconds.

Set
One-Touch Auto Setup
Simply point the projector toward the screen and press the Auto Setup button. The projector makes all the necessary settings itself.

These three functions give you a quicker start and a faster finish. They take all the trouble out of setting up, so you can concentrate on your presentation.

Presentation

Go
Direct Power Off
When the presentation is finished, you can switch off the power, unplug, and leave with the projector right away.

Quick Operation

5-Second Speed Start

Speed Start slashes the time it takes to get your presentation under way. The image appears in approximately 5 seconds after you press the power button. Behind this breakthrough is Panasonic's high-precision lamp and lamp power supply—an advantage made possible by our advanced production technology.

One-Touch Auto Setup with Digital Keystone Correction

This function assures quick and easy setup. The projector handles the basic image adjustments, from phasing to vertical and horizontal position. The built-in gravity sensor detects the projector's angle relative to the floor and corrects for vertical keystone distortion accordingly.

Direct Power Off

When the presentation is completed, Direct Power Off lets you disconnect the power cable and move the projector right away* because the cooling fan keeps operating until the lamp is cooled.

* The projector cannot be placed into a bag until the cooling fan stops operating.

Auto Search

This detects which signal is input and switches automatically. It also memorises the input last used so that you don't have to press the Input Select button next time you turn on the projector if you usually project the same input source.

Sophisticated Functions

Secure, Anti-Theft Features


The PT-LB10 series is designed with effective anti-theft features, including a User Password, Control Panel Lock and Text Superimposing. It also has a security lock slot compatible with the Kensington MicroSaver® cable.

Projector AI

It automatically adjusts the lamp power to the optimum level to match the characteristics of the picture in real time. The result is increased dynamic range for higher contrast.

Index Window

Any image in the presentation, RGB or video input, can be frozen, and displayed on the left or right side of the screen as an Index Window, while the display of subsequent images continues on the other side.

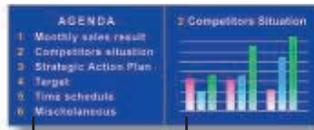

Index Window (Frozen Image)

Normal Window

Auto Power Off

This lets you specify a time (from 15 to 60 minutes, in 5-minute steps) after which the projector automatically enters standby mode if unused.

More Valuable Features

- Automatic input signal detector
- HDTV compatibility
- Full compatibility with sRGB colour space for accurate colour reproduction (in natural mode)
- Colour temperature selection (standard/high/low)
- Picture mode selection (standard/dynamic/natural)
- Blackboard mode allows you to project images onto an ordinary classroom or conference room blackboard*
- Still mode
- 3x digital zoom
- Freeze
- Shutter function for image and sound muting
- Selectable 8-language on-screen menu (English, German, French, Spanish, Italian, Russian, Chinese, Korean)
- Discrete S-Video and video inputs allow connection of two DVD/video sources at a time
- Card remote control
- Ceiling mountable (option)
- Lamp power high/low selection
- Temperature warning indication
- Lamp replacement warning indication

* Not featured on the PT-LB10VE

Direct Power Off

When the presentation is done, just unplug the power cord, pack up and go. The projector continues cooling even after you pull the plug, so you can move quickly from one site to the next.

Simple, easy-to-understand control buttons with logical layout



Separate power supply for cooling fan and control circuit

Easy Wireless Projection (PT-LB10NTE)

Wireless Presentation



The PT-LB10NTE adds an IEEE 802.11b-compliant wireless LAN function. Using the PT-LB10NTE with a PC that supports a wireless LAN*, you can conduct presentations

with wireless ease and freedom. Setup is simple. On your PC, just launch the "Wireless Manager ME (Mobile Edition)" program that comes bundled with the PT-LB10NTE, and select the desired functions. With wireless projection, there's no need to reconnect PC cables when you're using more than one PC.

* You can also use the PT-LB10NTE's wireless function with IEEE 802.11g-compliant PC models for they have IEEE 802.11b compatibility.



* With no obstruction. The operation range differs depending on the environment.
** Built-in or optional

Ecology-Conscious Design

Panasonic works from every angle to minimise environmental impact in the product design, production and delivery processes, and in the performance of the product itself over its life cycle. The PT-LB10 Series reflects the following ecological considerations.



- Lead-free solder is used to mount components to the printed circuit boards.
- No halogenated flame retardants are used in the cabinet.
- No styrofoam is used in the packing materials.
- Lead-free glass is used for the lens.
- The packing case and operating manual are made from recycled paper.

Simple Settings

We have simplified the process for installing Wireless Manager ME and setting up a PC for a wireless presentation. The process is even easier with Intel® Centrino™ PCs. Just insert the CD-ROM into a PC, and many settings are made automatically.* When the presentation is finished, Wireless Manager restores all PC settings to their original state, so the PC is ready to reconnect to your company LAN.

* The number of manual settings required may vary depending on the PC model.

User-Friendly Interface

All the operations you need for a wireless presentation can be controlled using the control panel displayed on your PC screen. This graphic user interface makes it easy to conduct the presentation.



Wireless Manager Control Panel

Handy "Live" Mode

Select Live mode from Wireless Manager's menu and you can project images the same way as when the projector and PC are connected by cable. This lets you give active, 'animated' presentations using PowerPoint® effects and motion-type Web pages, while still enjoying full wireless convenience.

Set yourself free.

Multi-Live Mode

In this mode, the PT-LB10NTE can receive data from several PCs and project in either of two

Four Window Style



Index Style



ways: Four Window Style and Index Style.

In Four Window Style, the PT-LB10NTE projects images into four separate windows. In

Index Style, it projects images from up to four PCs as small windows

(like thumbnails) along the bottom of the screen. Using the supplied remote control, you can then

select any one of the index windows and display it on the main window.

Other Wireless Features

- Projector control/status monitoring capability via an Internet browser
- Follows the Advanced Encryption Standard (AES), which has been adopted as an official U.S. Government standard
- One-shot mode

To use wireless functions, a PC is required that meets the conditions given below:

OS: Windows XP or 2000 recommended.

CPU: Pentium III 800 MHz or faster, or other compatible processor recommended.

Memory: 128 MB or more recommended.

Operation is not guaranteed for all computers that meet the above conditions.

PT-LB10 Series Feature Comparison

	PT-LB10NTE	PT-LB10E	PT-LB10VE	PT-LB10SE
Brightness	2000 lumens	2000 lumens	1600 lumens	2000 lumens
Contrast ratio	500:1	500:1	400:1	400:1
Native resolution (max.)	XGA (UXGA)	XGA (UXGA)	XGA (UXGA)	SVGA (UXGA)
Throw distance	1.1-11.0 m	1.1-11.0 m	1.1-11.0 m	1.1-11.0 m
5-Second speed start	Yes	Yes	Yes	Yes
One-touch auto setup	Yes	Yes	Yes	Yes
Direct power off	Yes	Yes	Yes	Yes
Blackboard mode	Yes	Yes	No	Yes
Notebook-size compact body (297 x 65 x 210 mm)	Yes	Yes	Yes	Yes
Weight	2.2 kg	2.1 kg	2.1 kg	2.1 kg
Wireless presentation capability	Yes	No	No	No



- ▶ The PT-LB10NTE comes supplied with an IEEE 802.11b-compliant wireless LAN card and original "Wireless Manager ME" software for quick and easy wireless presentations.


Set yourself free. 

Give Your Presentation From Wherever You Like

Imagine that you are listening to a presentation and the presenter projects some data onto the screen. You, however, have urgent updated data that it would be useful to share. With the PT-LB10NTE (and the presenter's permission, of course), you can join in.

The PT-LB10NTE lets you send data from a notebook PC directly to the projector—no cables or wires to connect—for projection onto the screen. You don't even have to leave your seat.

The Panasonic PT-LB10NTE has achieved an entirely new level of wireless ease and mobility, freeing you from the bondage of cables connecting projector with PC. That the PT-LB10NTE is also exceptionally compact and lightweight makes this achievement even more remarkable.

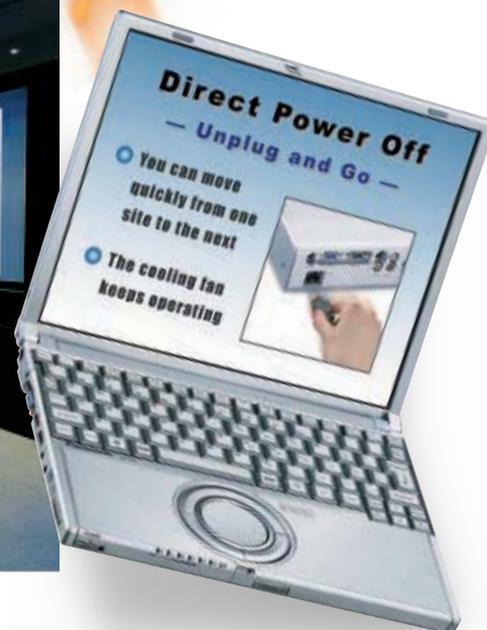

Rear View



Optional ceiling mount bracket: ET-PCK80


Specifications

Power supply 100–240 V AC, 50/60 Hz
Power consumption 220 W (6 W in standby mode with fan stopped)
Optical system Dichroic mirror separation/prism synthesis system
LCD panel
Panel size 0.7" diagonal with micro lens array (4:3 aspect ratio)
Display method Transparent LCD panel (x 3, R/G/B)
Drive method Active matrix
Pixels
PT-LB10TE/LB10E/LB10VE 786,432 (1,024 x 768) x 3, total of 2,359,296 pixels
PT-LB10SE 480,000 (800 x 600) x 3, total of 1,440,000 pixels
Pixel configuration Stripe
Lens Manual zoom/focus lens (1:1–1:1.2), F 1.7–1.9, f 21.5–25.8 mm
PT-LB10TE/LB10E/LB10SE F 2.0–2.3, f 22.0–26.2 mm
PT-LB10VE 155 W UHM™ lamp
Lamp Full colour (16,777,216 colours)
Colours
Brightness
PT-LB10TE/LB10E/LB10SE 2000 lumens
PT-LB10VE 1600 lumens
Uniformity 90%
Contrast
PT-LB10TE/LB10E 500:1** (full on/full off)
PT-LB10VE/LB10SE 400:1** (full on/full off)
Scanning frequency
RGB Horizontal: 15–91 kHz, Vertical: 50–85 Hz
YPbPr 480i (525i): fh 15.75 kHz; fv 60 Hz
 576i (625i): fh 15.63 kHz; fv 50 Hz
 480p (525p): fh 31.5 kHz; fv 60 Hz
 576p (625p): fh 31.25 kHz; fv 50 Hz
 720p (750p): fh 45 kHz; fv 60 Hz
 1080i (1125i): fh 33.75 kHz; fv 60 Hz
 1080i (1125i): fh 28.125 kHz; fv 50 Hz
 NTSC, NTSC4.43, PAL-M, PAL60: fh 15.75 kHz; fv 60 Hz
 PAL, SECAM, PAL-N: fh 15.63 kHz; fv 50 Hz
 838–7,620 mm (33–300 inches) diagonally
S-Video/Video
Projection size
Throw distance
PT-LB10TE/LB10E/LB10SE 1.1–10.7 m (37–35'1")
PT-LB10VE 1.1–11.0 m (37–36'1")
Optical axis shift 6:1 (fixed)
Screen aspect ratio 4:3
Keystone correction range Vertical: approx. ±30°
On-screen menu 8 languages: English, French, German, Spanish, Italian, Chinese, Korean, Russian
Installation Ceiling/desk, front/rear (menu selection)
Built-in speakers 1.0 W (monaural) output power

Terminals
RGB IN
RGB signal D-sub HD 15-pin x 1
 G: 0.7 Vp-p (1.0 Vp-p for Sync on G), 75 Ω
 R, B: 0.7 Vp-p, 75 Ω
 HD, VD, SYNC: TTL, high impedance (positive/negative polarity)
YPbPr signal Y: 1.0 Vp-p (including sync signal), 75 Ω
 PB, PR: 0.7 Vp-p, 75 Ω
RGB OUT
RGB signal D-sub HD 15-pin x 1
 G: 0.7 Vp-p (1.0 Vp-p for Sync on G), 75 Ω
 R, B: 0.7 Vp-p, 75 Ω
 HD, VD, SYNC: TTL, high impedance (positive/negative polarity)
YPbPr signal Y: 1.0 Vp-p (including sync signal), 75 Ω
 PB, PR: 0.7 Vp-p, 75 Ω
VIDEO IN RCA pin x 1, 1.0 Vp-p, 75 Ω
S-VIDEO IN Mini DIN 4-pin x 1,
 Y: 1.0 Vp-p, C: 0.286 Vp-p, 75 Ω
AUDIO IN RCA (L, R) x 1, 0.5 Vrms, for RGB/VIDEO/S-VIDEO
SERIAL Mini DIN 8-pin x 1 (RS-232C)
Wireless card slot (PT-LB10TE) x1, For supplied CompactFlash™ type wireless card
Power cord length 2 m (6'7")
Cabinet material ABS/PC
Dimensions (W x H x D) 297 x 65 x 210 mm (11-23/32" x 2-9/16" x 8-9/32")**
Weight
PT-LB10TE 2.2 kg (4.9 lbs.)
PT-LB10E/LB10VE/LB10SE 2.1 kg (4.7 lbs.)
Operating environment
Temperature 0°–40°C (32°–104°F)
Humidity 20%–80% (no condensation)
Remote control unit
Power supply 3 V DC (Lithium CR2025 battery x 1)
Operation range* Approx. 7 m (23 feet) when operated from directly in front of the signal receptor
Dimensions (W x H x D) 40 x 86 x 6.5 mm (1-9/16" x 3-3/8" x 1/4")
Weight 18 g (0.6 oz.) (including a battery)
Wireless card (PT-LB10TE)
Standard IEEE802.11b
Supplied accessories
 • Card-type remote control • Battery for remote control • Power cord
 • VGA cable • Carrying bag • Software CD-ROM (PT-LB10TE)
Optional accessories
ET-LAB10 Replacement lamp unit
ET-PCK80 Ceiling mount bracket
ET-RM300 Full-function wireless remote control
ET-ADSER Serial adapter (DIN 8-pin/D-sub 9-pin)
ET-CDWL3 IEEE802.11b-compliant wireless LAN card for PC (PT-LB10TE)

*1: In AI mode. *2: Height including protruding parts and legs: 72 mm (2-27/32").
 *3: Operation range differs depending on the environment.

Dimensions

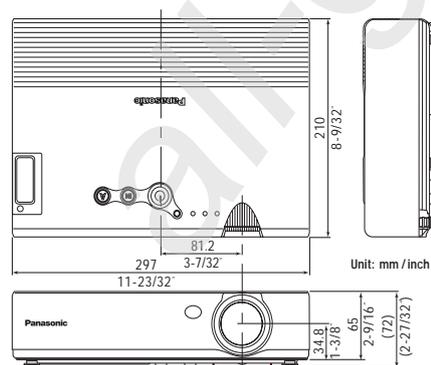

Projection Distance

PT-LB10TE/LB10E/LB10SE

Diagonal image size (4:3 aspect ratio)	Distance to screen		Height from the edge of screen to centre of lens
	min.	max.	
33 / 0.84 m / 2.7	–	1.1 m / 3.6	8 cm / 3.1
40 / 1.02 m / 3.3	1.2 m / 3.9	1.4 m / 4.6	9 cm / 3.5
50 / 1.27 m / 4.2	1.5 m / 4.9	1.7 m / 5.6	11 cm / 4.3
60 / 1.52 m / 4.9	1.8 m / 5.9	2.1 m / 6.9	14 cm / 5.5
70 / 1.78 m / 5.8	2.1 m / 6.9	2.4 m / 7.9	16 cm / 6.3
80 / 2.03 m / 6.7	2.4 m / 7.9	2.8 m / 9.2	18 cm / 7.1
90 / 2.29 m / 7.5	2.7 m / 8.9	3.2 m / 10.5	20 cm / 7.9
100 / 2.54 m / 8.3	3.0 m / 9.8	3.5 m / 11.5	22 cm / 8.7
120 / 3.05 m / 10.0	3.6 m / 12.5	4.2 m / 13.8	26 cm / 10.2
150 / 3.81 m / 12.5	4.5 m / 14.8	5.3 m / 17.4	33 cm / 13.0
200 / 5.08 m / 16.7	6.0 m / 19.7	7.1 m / 23.3	44 cm / 17.3
250 / 6.35 m / 20.8	7.5 m / 24.6	8.9 m / 29.2	55 cm / 21.7
300 / 7.62 m / 25.0	9.0 m / 29.5	10.7 m / 35.1	66 cm / 26.0

PT-LB10VE

Diagonal image size (4:3 aspect ratio)	Distance to screen		Height from the edge of screen to centre of lens
	min.	max.	
33 / 0.84 m / 2.7	–	1.1 m / 3.6	8 cm / 3.1
40 / 1.02 m / 3.3	1.2 m / 3.9	1.4 m / 4.6	9 cm / 3.5
50 / 1.27 m / 4.2	1.5 m / 4.9	1.8 m / 5.9	11 cm / 4.3
60 / 1.52 m / 4.9	1.8 m / 5.9	2.1 m / 6.9	14 cm / 5.5
70 / 1.78 m / 5.8	2.1 m / 6.9	2.5 m / 8.3	16 cm / 6.3
80 / 2.03 m / 6.7	2.4 m / 7.9	2.9 m / 9.5	18 cm / 7.1
90 / 2.29 m / 7.5	2.8 m / 9.2	3.2 m / 10.5	20 cm / 7.9
100 / 2.54 m / 8.3	3.0 m / 9.8	3.6 m / 11.8	22 cm / 8.7
120 / 3.05 m / 10.0	3.7 m / 12.1	4.3 m / 14.1	26 cm / 10.2
150 / 3.81 m / 12.5	4.6 m / 15.1	5.4 m / 17.7	33 cm / 13.0
200 / 5.08 m / 16.7	6.1 m / 20.0	7.3 m / 24.0	44 cm / 17.3
250 / 6.35 m / 20.8	7.6 m / 24.9	9.1 m / 29.9	55 cm / 21.7
300 / 7.62 m / 25.0	9.2 m / 30.2	11.0 m / 36.1	66 cm / 26.0

Panasonic

Weights and dimensions shown are approximate. Specifications are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. UHM is a trademark of Matsushita Electric Industrial Co., Ltd. Intel and Centrino are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. VGA and XGA are trademarks of International Business Machines Corporation. Windows and PowerPoint are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective trademark owners. Projection images simulated.

